


Border Lite

Cat. No. BL
Cat. No. BL/R



The Border Lite is ideal for path lighting giving a wide spread of light with no upward projection. This luminaire has a fully adjustable arm allowing 360 degree rotation and 0 - 90 degree elevation.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 240/12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer, this changes the luminaire to an IP56 rating.

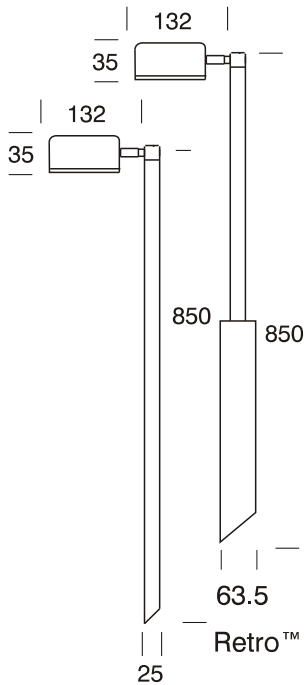

Ordering Information

Luminaire Type

BL - Border Lite

Material/Finish

BK - Black
BZ - Bronze
GN - Green
MS - Metallic Silver
WH - White

Accessories

CJK150 - CJK150 Cable Joint Kit
DCL - Clear Lens
/R - Retro™ Transformer
240/12 volt
SSP/G - Hunza® Super Spike



Ordering Example: BL BZ - Border Lite in Bronze

BL/R BK - Border Lite Retro™ Black

SSP/G - Hunza® Super Spike
(Accessories ordered separately)



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
hunza@hunza.co.nz www.hunza.co.nz
Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.
3237 Long Island St, W. Sacramento, California 95691, USA.
Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

Luminaire Construction

Head:

Cast from virgin high corrosion resistant CC401 low copper aluminium alloy, with chromate substrate and high UV resistant polyester powder coat -

Colours Black, Bronze, Green, Metallic Silver, White.

Poles: Aluminium, 25.4mm (1") x 850mm (33½") tube.

Retro™: Pole - 25.4mm (1") x 410mm (16") tube.

Transformer Pole 63.5mm (2½") x 440mm (17½").

Mounting

Pole 850mm (33½") directly mounted into the earth or for extra stability in sand or loose ground use a Hunza® Super Spike. Retro™ - set in concrete.

Features

Lens:

47mm (1 13/16") x 47mm (1 13/16") x 3mm (1/8") Frosted tempered shatter resistant glass.
Life Time Warranty.

Gaskets:

Nytrol rubber, 150°C (302°F).

Lamp Holder:

GU4 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK 50).
Not approved for USA /Canada.

Hunza® Super Spike, not Retro™ option (Cat. SSP/G).

Clear Lens (Cat. DCL).

Retro™ transformer 240/12 volt (Cat. /R) IP56.

Swivel :

360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Standards

IP56 / IP66  UL1838

Luminaire Weight

12 volt:

.500kg (1lb 1oz)

Retro™:

1.845kg (4lb 1oz)

Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

RETRO™ IP56

HUNZA® 240/12 volt ac silicone encapsulated electronic transformer is built into the pole. Dimmable with a suitable leading edge dimmer.

USA and Canada

HUNZA® Wall Mount Transformer: not included.

Luminaire: supplied with

GU4 Bi - Pin 20 or 50 watt lamp max.

Retro™ GU4 Bi - Pin 20 or 50 watt lamp max.

USA and Canada

GU4 Bi - Pin 20 watt lamp max.



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd