


Mounting Canisters

Cat. No.

Canss, Dkcan, Flcan,
Flucan, PLcan, Sscan.

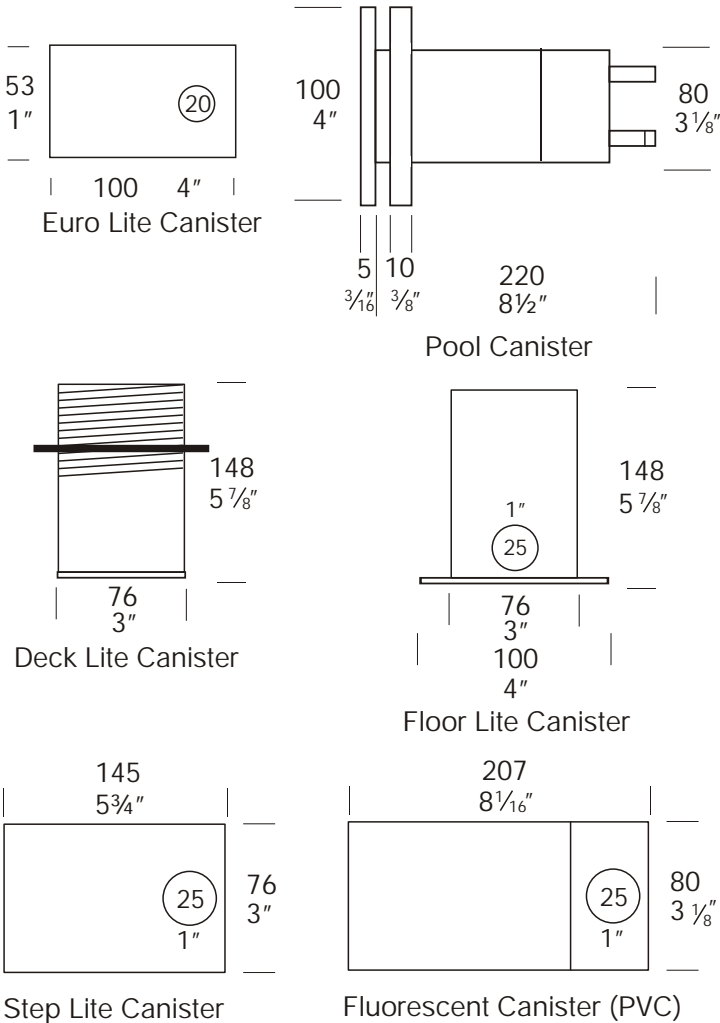

Hunza® mounting canisters provide an efficient and professional method of luminaire mounting. The Step Lite canisters are available in aluminium and 316 stainless steel for high corrosion locations e.g. sea front areas and lime stone installations etc. The Fluorescent canister is manufactured from PVC. The Deck canister is adjustable and is suitable for use in varying thicknesses of timber - 10mm (3/8") - 75mm (3").

Ordering Information

Canister Type	Material
Canss - Step Canister	316 Stainless Steel
Dkcan - Deck Canister	Aluminium
Elcan - Euro Lite Canister	Aluminium
Flcan - Floor Lite Canister	Aluminium
Flucan - Fluorescent Canister	PVC
PLcan - Pool Canister	PVC
Sscan - Step Canister	Aluminium

Ordering Example: Flucan - Fluorescent Canister in PVC



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
 USA: Ph: 310 560 7310 Fax: 1 877 692 4589.
 hunza@hunza.co.nz www.hunza.co.nz
 Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.
 3237 Long Island St, W. Sacramento, California 95691, USA.
 Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

Canister Construction

CNC machined from one of the following materials:

DKcan, ELcan, FLcan and SLcan:

High corrosion resistant 76.6mm (3") x 6mm (1/4") aluminium with chromate substrate -

Canss:

Stainless steel 316 76mm (3) x 5mm (3/8").

FLucan and PLcan:

Engineering Grade PVC with moulded PVC end cap.

Mounting

When using a Hunza™ canister - the canister, conduits and cables are installed at the same time. On final completion the luminaire is wired to the supply cable and fitted into the canister. The luminaire is held by two silicone "O" rings in the canister.

Canss, ELcan, FLcan, FLucan, SLcan : Cast into concrete, brick, concrete blocks, etc.

DKcan: mounted into wooden decks, wooden frames, etc.

PLcan: cast into a new concrete wall, epoxied into an existing concrete wall or use lock nut provided with canister to clamp tight in a fibre glass pool wall.

Features

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Conduit Entry Size:

25mm (1").

Installation:

Due to the gasket mounting system the luminaire has no screw holes in it's flange to mount it in position.

Deck Canister:

Adjustable locking ring with 4 counter sunk screw holes suitable for use with timber 10mm thicknesses (3/8") - 75mm (3").

Fluorescent Canister:

Manufactured from PVC, no earthing of the canister is required.

Pool Canister:

Manufactured from PVC, suitable for mounting three wall types - fibre glass pool wall, existing concrete pool wall, new concrete pool wall.

Standards

UL1838



Canister Weight

Canss 1.040kg (2lb 4oz)

DKcan .515kg (1lb 2oz)

ELcan .410kg (14oz)

FLcan .510kg (1lb 1oz)

Flucan .190kg (6oz)

PLcan .210kg (7oz)

SLcan .460kg (1lb)



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd