


Fluorescent

Option

Cat. No. FL



A 240 volt 5 watt fluorescent option is available which offers excellent light output, low energy usage and low heat generation. This option is ideal for public areas where low operating temperature luminaires are essential for the safety of children, etc. Tier Lites and Path Lites, with the fluorescent option, are suitable for commercial installations where long lamp life is required and ease of 240 volt cable runs is a factor .

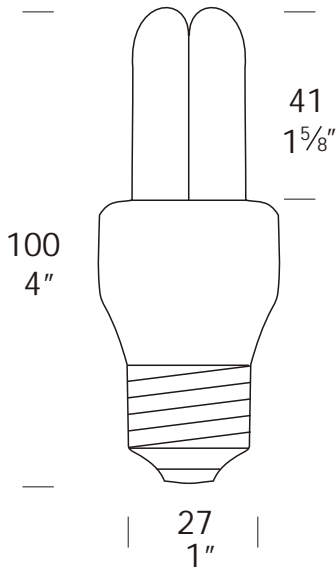

Ordering Information

Lamp Type

fl - Fluorescent Option



Ordering Example: TLCOPfl - Tier Lite in Copper with Fluorescent Option.

Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
hunza@hunza.co.nz www.hunza.co.nz
Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.
3237 Long Island St, W. Sacramento, California 95691, USA.
Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

Luminaire Construction

Increases Luminaire body length by 61.5mm (2½").

Mounting

An E27 PET 210° (410°f) base mount lamp holder is fixed to the luminaire end cap.

Features

Lamp Holder Required:

E27 PET 210° (410°f) base mount.

Wattage:

5 watt

Suitable for use with:

Bollard 300 & 700, Floor & Floor Lite Square, Pagoda Lite, Path Lite, Step & Step Lite Square, Step Lite Louvre & Step Lite Louvre Square, Solid Step & Solid Step Lite Square, Tier Lite.

Standards

IP66  CE

Power Supply

110 volt ac 60Hz.
240 volt ac 50Hz.



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd