


Spike Spot Metal Halide

Cat. No. SS/MH



Metal Halide lamps are highly energy efficient light sources using less energy and out putting 2 - 3 times the light of a halogen lamp. This luminaire is easily inserted into the ground and has a fully adjustable head allowing 360 degree rotation and 0 - 90 degree elevation adjustment. This luminaire uses a MR16 GX10 lamp.

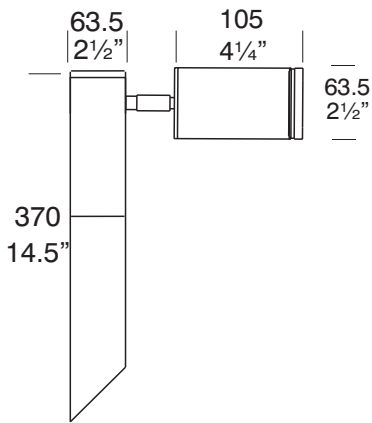

Ordering Information

Luminaire Type

SS/MH - Spike Spot

Material/Finish

BK - Black
 BZ - Bronze
 GN - Green
 MS - Metallic Silver
 COP - Copper
 SS - 316 Stainless Steel

Accessories

CJK 150 - Cable Joint Kit
 DFL - Frosted Lens
 GG - Glare Guard

Ordering Example SS/MH COP - Spike Spot Adjustable in Copper

GG BK - Glare Guard in Black
 (Accessories ordered separately)



DesignPatent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.3

© 2007 Hunza Holdings Ltd

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2 1/2") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2 1/2") rod, with chromate substrate and high UV resistant polyester powder coat -

Colours Black, Bronze, Green, Metallic Silver.

Copper 63.5mm (2 1/2") x 10mm (13/32"). End cap - solid copper 63.5mm (2 1/2") rod.

Stainless steel 316 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2 1/2") rod.

Mounting

Ground spike 150mm (6") directly into the ground.

Features

Lens:

3mm (1/8") flush clear tempered shatter resistant glass.

Life Time Warranty

Gasket:

Silicone, iron impregnated 220°C (428°F)

Lamp Holder:

GX10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK 50).

Frosted Lens (Cat. DFL).

Glare Guard (Cat. GG).

Swivel :

Aluminium and Copper luminaires -360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

AS / NZS 60598.2.2 IP66



UL1598

Luminaire Weight

Alum 1.555kg (1lb 1oz)

Cop 1.240kg (2lb 11oz)

SS 1.080kg (2lb 6oz)

Power Supply


Ballast built in: 230 - 240 volt ac 50Hz.

USA and Canada:




Ballast built in: 120 volt ac 60Hz.

Luminaire: supplied with

MR16 GX10 20 watt M156 lamp.

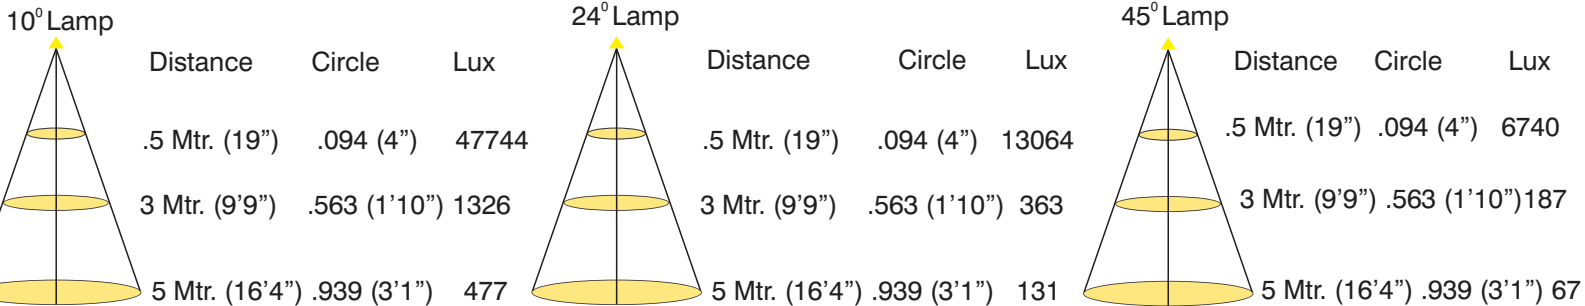

Distribution of Luminous Intensity. Diagrams show polar light intensity curves and beam angles for vertical base up orientation

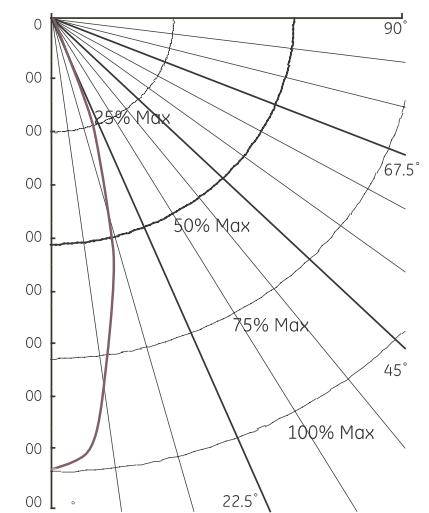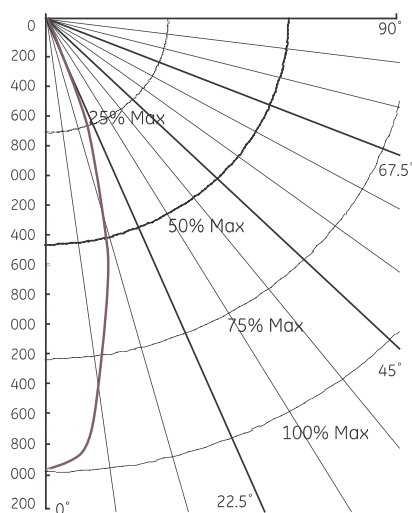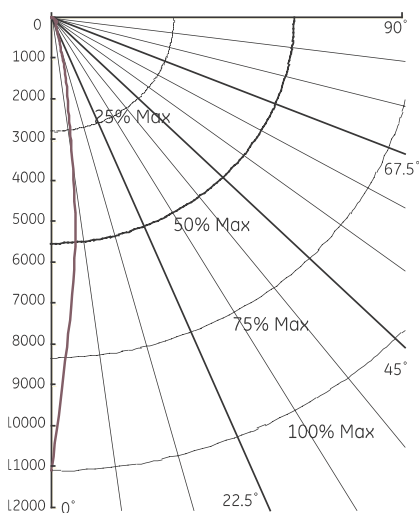

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2007 Hunza Holdings Ltd

Ver 1.3