




LED Array

Cat. No. /LED



HUNZA® luminaires can be specified with LED arrays (not the entire range). The arrays contain nine LED's in white, blue, red, green or yellow with an output of 17 lumens per watt. LED arrays have extremely long operational lives - up to 100,000 hours with the additional advantage of very low heat output. It is viable to install LED luminaires in difficult to get at places due to the low maintenance and long life of the array. Operational voltage is 24 volt DC at 1.2 watt.




Ordering Information

Luminaire Type

/LED - LED Array

Colour

- BU - Blue
- WH - White
- GN - Green
- RD - Red
- YL - Yellow

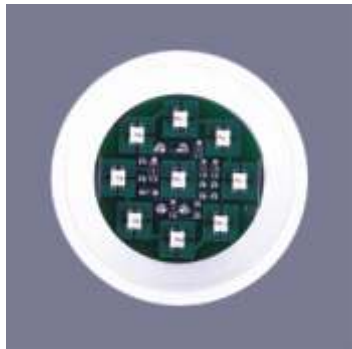

Ordering Example: FLSPsq/LEDbu - Floor Lite Spot square with Blue LED Array.

Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
 USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
 hunza@hunza.co.nz www.hunza.co.nz
 Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.
 3237 Long Island St, W. Sacramento, California 95691, USA.
 Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

LED Array Construction

CNC machined from :

Aluminium LED ring - high corrosion resistant 63.5mm (2 ½" aluminium with chromate substrate and high UV resistant white polyester powder coat.

Mounting

Substitute MR11 (array only) or MR16 lamp for LED array, fits directly into HUNZA® luminaire. The LED array does not affect the IP (water protection) rating of the luminaire.

Features

Lens:

A frosted lens is fitted as standard.

Gasket:

Silicone, iron impregnated 220°c (428°f)

Suitable for use with:

Cabin, Cockpit, Euro Step, Floor and Floor Lites Square, Step and Step Lites Square, Pillar, Wall Down Lites.

Accessories:

Clear lens (Cat. DCL)

Standards

IP66 / IP68

(depending on the IP rating of the luminaire.)

LED Weight

15gms (½oz)

Power Supply

HUNZA® H20/24LED: not included.

HUNZA® Inground Transformer IG20LED: not included

100 - 240 50/60Hz. 24 volt d.c. 6va electronic transformer: not included.

USA / Canada:

100 - 240 50/60Hz. 24 volt d.c. 6va electronic transformer, fits inside luminaire: not included.



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd